

**BONTRAGER****WHEEL SPECIFICATIONS**

Line Comp 30 Front TLR Disc 29 Boost

**Wheel Components**

TCG Part Number	Description
5254021	Wheel
NA	Hub (OE use only, not available for aftermarket purchase)
5268671	Rim
W438582	Drive Side Spokes
W438581	Non-Drive Side Spokes (279mm 14ga. J-bend)
415761	Nipples
W439598	Tubeless Rim Strip
W527257	Tubeless Valve Stem

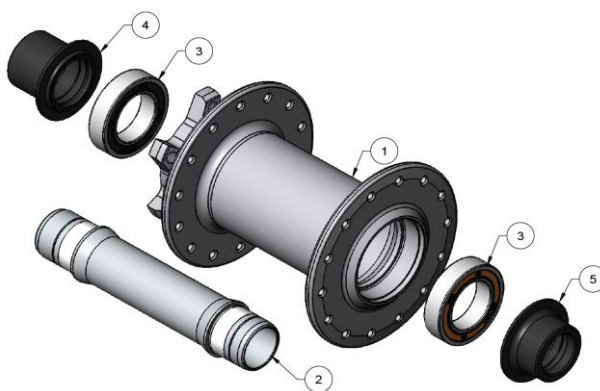
**Hub Service Parts**

Diagram Number	TCG Part Number	Description
1	NA	Hub Shell
2	516627	Axle
3	431759	30187 Bearing 18x30x7 (2 required)
4,5	431778	End Caps 15mm

## Wheel Building Information and Specifications

Value	Description or Specification
<b>Wheel Building Information</b>	
0.5	Hop (mm)
0.5	Wobble (mm)
NA	Wheel stress level right side up (degrees of rotation, measured on Bontrager Stressor)
NA	Wheel stress level left side up (degrees of rotation, measured on Bontrager Stressor)
1.0	Dish (mm) - Maximum gauge reading (First side rim to endcap minus second side rim to end cap)
195 lbs min, 325 lbs max OR 87 kgf min, 148 kgf max	Spoke tension - disc side
Lacing pattern non-disc side	2 cross, woven. First hole CCW from valve hole is a pushing spoke (viewed from the non-disc side).
Lacing pattern disc side	2 cross, woven. First hole CCW from valve hole is a pulling spoke (viewed from the disc side).
<b>Size Specifications</b>	
286mm	Spoke length drive
285mm	Spoke length non-drive
608mm	Rim ERD
20mm	Rim height
33mm	Rim outer width
28.5mm	Rim hook bead width
NA	Rim spoke offset
<b>Other Specifications</b>	
920g	Wheel weight
Black/Black/Black	Wheel color
Black	Hub color
Black	Spoke color
Black/Anthracite	Rim color
28	Spoke count
14G	Spoke gauge
6-Bolt	Disc bolt pattern
Yes	Tubeless ready

I

I

